

# 1000/1250 AND PAS250 1000/1250 PODIUM ASSEMBLY GUIDE



Dimensions — Platform at 1M and 1.25M x Width — 0.65M x Depth 1.3M

Working Height — 3M and 3.25m (MAX)

Dimensions — Folded Height — 2.05M x Width - 0.25M x Depth - 1.3M

Weight — MK1 .33KG Safe Working Load - 150kg

PAS 250 MK1 36KG

Manufactured under an ISO9001:2008 Quality System

Complies fully with the Working at Height Regulations 2005 and PAS250

Specifications

Lightweight all Aluminium Construction

For further information or assistance, please contact


Interlink Alloy Systems Limited—Tel 01992 716509

Or visit: [www.interlinkalloy.co.uk](http://www.interlinkalloy.co.uk)

# 1000/1250 AND PAS 250 1000/1250 PODIUM UNIT ASSEMBLY GUIDE



1 X FOLDING FRAME  
1 X PLATFORM  
1 X LADDER  
2 X STABILISER( MINI OR STANDARD)(FOR PAS 250 COMPLIANCE)  
2 X GUARDRAIL BRACE

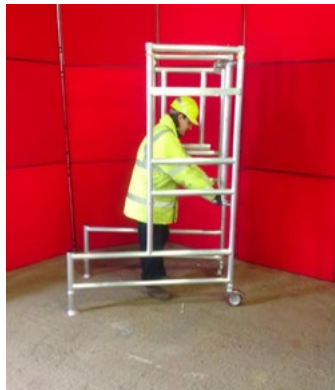

2) OPEN FRAME AND LOCK MECHANISM



3) FIT PLATFORM AT CORRECT HEIGHT



4) POSITION UNIT AND LOCK CASTORS



5) CLIP UPPER BRACE OF LADDER ABOVE RINGS ON VERTICALS WITH ASSEMBLED HOOKS AT TOP



6) FIT STABILISERS TO BACK VERTICALS( FOR PAS 250 COMPLIANCE)



7) USE LADDER TO ACCESS PLATFORM



8) CLOSE AND LOCK GATE




9) TO WORK AT UPPER LEVEL RELOCATE PLATFORM



10) MOVE SIDE FRAMES UP AND LOCATE CLIPS IN HOLES




11) FIT GUARDRAIL BRACES AT FRONT AND BACK OF UNIT

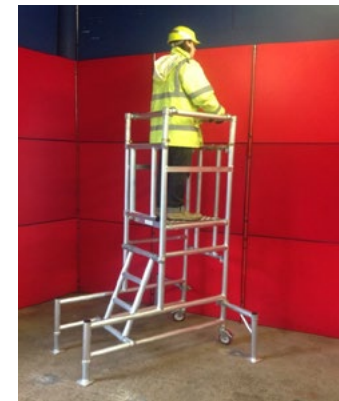


12) CLOSE AND LOCK GATE


# IMPORTANT SAFETY NOTES




ALWAYS READ THE INSTRUCTIONS  
BEFORE USING PODIUM




NEVER USE A PODIUM WITH  
DAMAGED OR MISSING COMPONENTS




NEVER OVERREACH




NEVER HAVE MORE THAN ONE  
PERSON ON THE PLATFORM




NEVER USE ON UNEVEN  
OR SLOPING SURFACES




DO NOT MOVE PODIUM IF A  
PERSON IS STILL ON IT




NEVER USE BOXES FOR EXTRA  
HEIGHT, STAND ONLY ON THE PLATFORM



NEVER USE PODIUMS AS A MEANS  
OF ACCESS TO ANOTHER PLACE.



NEVER USE PODIUMS NEAR  
ELECTRICAL POWER LINES



ALWAYS LOCK ALL CASTORS WHEN  
PODIUM IS SITED, AND BEFORE USE.

BE AWARE OF THE FOLLOWING:-

- A. DO NOT USE ON LOOSE OR SLIPPERY SURFACES.
- B. NEVER STAND ON THE ACCESS LADDER TO WORK.
- C. WORKING PLATFORM MUST BE LEVEL.
- D. INSPECT BEFORE USE.
- E. ONLY ASCEND OR DESCEND THE LLWP USING THE ACCESS PROVIDED.
- F. FACE THE FOLDING BACK SECTION WHEN ASCENDING OR DESCENDING.
- G. ENSURE THE GATE IS CLOSED AND LOCKED BEFORE USE.
- H. BEWARE OF FINGER TRAPS.
- J. TO MOVE UNIT UNLOCK GATE AND DISMOUNT, UNLOCK CASTORS AND RE-LOCATE.
- K. IF IN DOUBT DO NOT GUESS CONSULT YOUR SUPPLIER.
- L. SEE OVERLEAF FOR COMPONENT CHECKLIST